

# Specification for approval

**Description (产品类型) :** Differential Current Sensor

**Customer P/N (客户) :** \_\_\_\_\_

**ZETTLER P/N (赛特勒) :** APE00D0332WG-114

**Revision (版本号) :** PD1.2

**Drafted (编制) :** Yanggui Su

**Checked (审核) :** Arvin Zou

**Approved (批准) :** Aaron Chen

Organic silicon free

Phosphorus-free

**RoHS**  
COMPLIANT

PD1.2	2024/09/10	Modify the typical application diagram and figure; Modify the electrical specification.	Yanggui Su
PD1.1	2024/05/23	Modify the features and outline drawing, modify label , typical application diagram and figure; Add the PCB footprint	Yanggui Su
PD1.0	2023/11/16	Initial release	Yanggui Su
Rev.	Date	Description	Approved

**Approved by Customer (客户确认) :** \_\_\_\_\_

Friendly Reminder: Please help to sign this Spec when approve , and fax to our company . Or else, we will consider you have accepted it and make future order based on this Spec.

友情提示:请在签字确认后,按封面的传真号码回传给赛特勒磁电有限公司.如无回传,则视为默认,后续的相关订单将以按本承认书的规定为技术要求

## FEATURES (产品特点)


- PCB mounted RCD module
- Excellent accuracy
- Fluxgate current sensor with toroidal core
- Switching push-pull outputs
- Compact design

## APPLICATIONS (应用)

Mainly used for stationary and mobile applications:

- Compliance With IEC62752

## OUTLINE DRAWING (外形图)

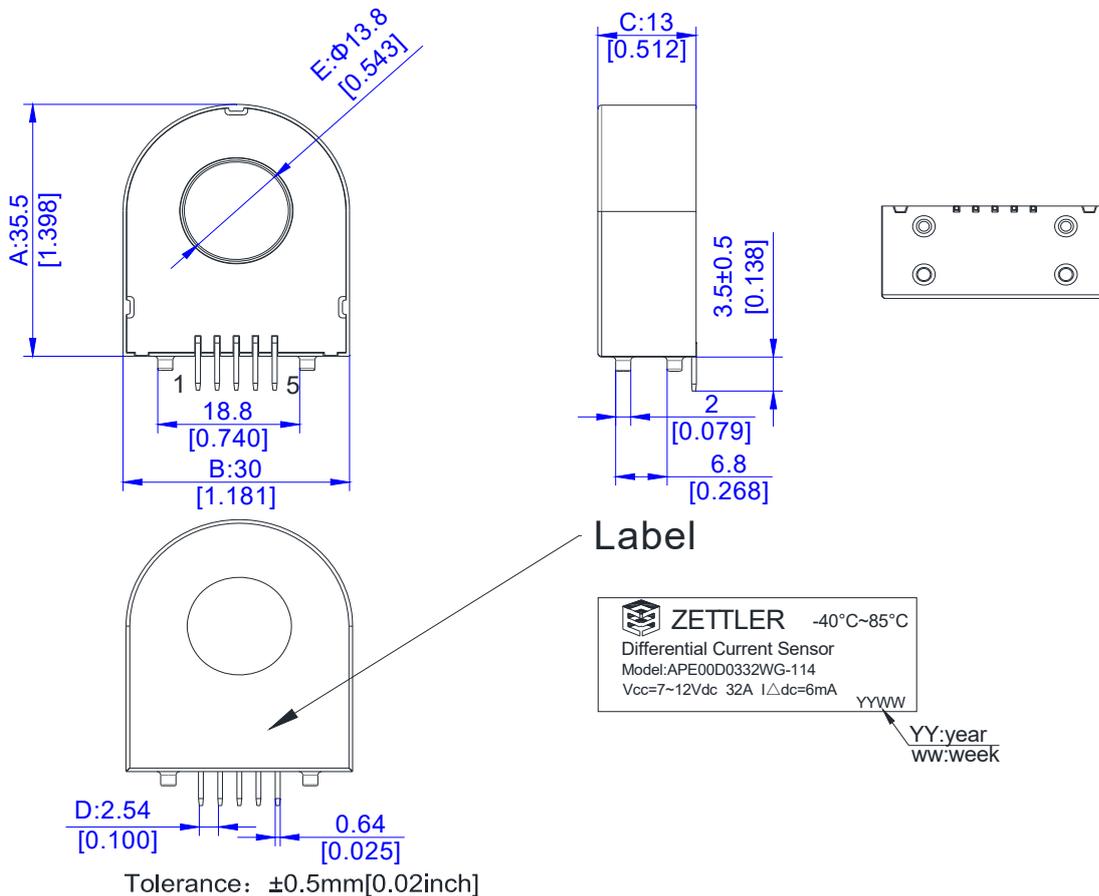


## TYPICAL APPLICATION DIAGRAM: (应用图)

General description of sensor function:

The Sensor is sensitive to AC and DC current and can be used for fault current detection in IC-CPD applications.

The Sensor detects AC and DC fault currents according to IEC62752:2016. In the event of a DC fault current, PIN 3 will change its state from a low level (GND) to high level state (5V). In the event of an AC fault current, PINs 3 and 4 will change state from a low level (GND) to a high level state.

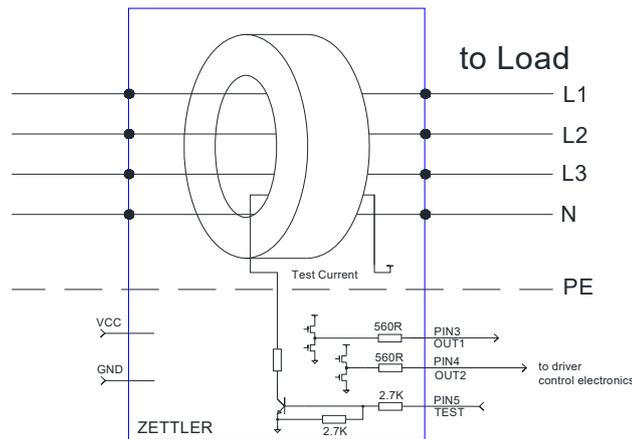

OUT1(PIN3)	OUT2(PIN4)	State
GND	GND	Normal condition
High level	GND	>6mADC
High level	High level	>30mArms
High level	High level	DC>6mA and AC>30mA

OUT1 must triggers from  $I_d \geq 6\text{mA DC}$  AND  $\geq 30\text{mA ACrms}$   
 OUT2 must triggers from  $I_d \geq 30\text{mA ACrms}$  AND may triggers from  $I_d > 30\text{mA DC}$

PIN description:	
PIN no.	Description
PIN 1 --> VCC	Positive supply voltage 7-12V
PIN 2 --> GND	Ground connection
PIN 3 --> OUT1 ( push-pull output)	If the residual current is below 6mA dc and no system fault occur the output on PIN 3 is a low level (GND). In any other case output PIN 3 is in a high level state (5V).
PIN 4 --> OUT2 ( push-pull output)	If the residual current is higher than the 30mA rms. and the Output on PIN 4 is a high level state (5V)..
PIN 5 --> TEST(refer to figure)	A function test is activated if this PIN is connected to high level. <b>Attention:</b> During the functional test no differential current shall flow. If a push-pull switch is used, the voltage range must be 0V...5V.


## ELECTRICAL SPECIFICATION (电性能参数)

Symbol	Parameter	Condition	min.	typ.	max.	Unit	remark
$I_P$	Primary rated current (1phase/3phase)			32	40	A	
$I_{\Delta N,max}$	Measuring range (peak)		-300		300	mA	
$f_{BW}$	Frequency range		DC		1	kHz	
$I_{\Delta N1}$	Rated residual operating current 1		3.0	4.2	6	mA DC	
$I_{\Delta N2}$	Rated residual operating current 2		15	25	30 <sup>(1)</sup> / 420 <sup>(2)</sup>	mA RMS	(1) f = DC to 150Hz (2) f = 150Hz to 1kHz
$T_r$	Response time	AC: $I_n=1*I_{\Delta N2}$		50	300	ms	Interrupting Time according to according to IEC62752 (E)-1:2016 Table 2 + 3
		AC: $I_n=2*I_{\Delta N2}$		10	150		
		AC: $I_n=5*I_{\Delta N2}$		5	40		
	Response time	DC: $I_n=1*I_{\Delta N1}$		600	10000		
		DC: $I_n=10*I_{\Delta N1}$		10	300		
		DC: $I_n=50*I_{\Delta N1}$		2	40		
$I_{\Delta R1}$	Hysteresis recovery current level for $I_{\Delta N1}$ (absolute value dc)			2.5		mA	OUT1 will remain in their states until $I_{\Delta}$ is below the recovery threshold $I_{\Delta R1}$
$I_{\Delta R2}$	Hysteresis recovery current level for $I_{\Delta N2}$ (absolute value rms)			10		mA	OUT2 will remain in their states until $I_{\Delta}$ is below the recovery threshold $I_{\Delta R2}$
$V_{CC}$	Supply voltage		7	12	12.48	V	
$I_{CC}$	Consumption current			10	30	mA	
$T_A$	Ambient operation temperature		-40		85	°C	

### Absolute maximum ratings


Symbol	Parameter	Condition	min.	typ.	max.	Unit	remark
$V_{PIN}$	Voltage on pins with respect to GND (PINs 3,4 and 5)				5.5	V	
$I_{PIN}$	Current on pins (PINs3,4and 5)				50	mA	
$U_{MAX}$	Maximum rated voltage of primary conductors				440	V	

### PCB Footprint:

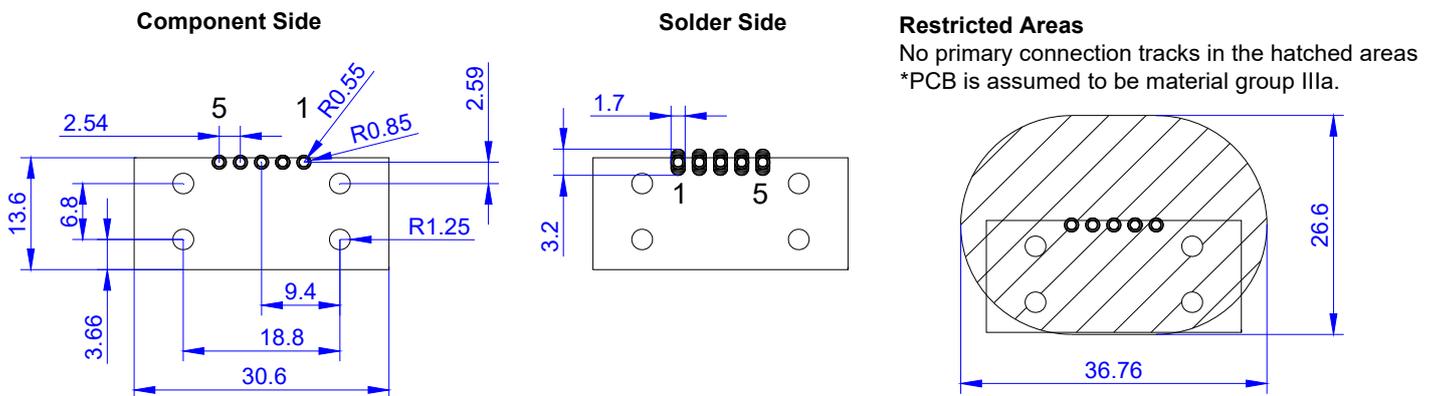

### Figure:

After activating the test sequence, the end product has to monitor the correct state of the switching outputs being used at the following points in time.

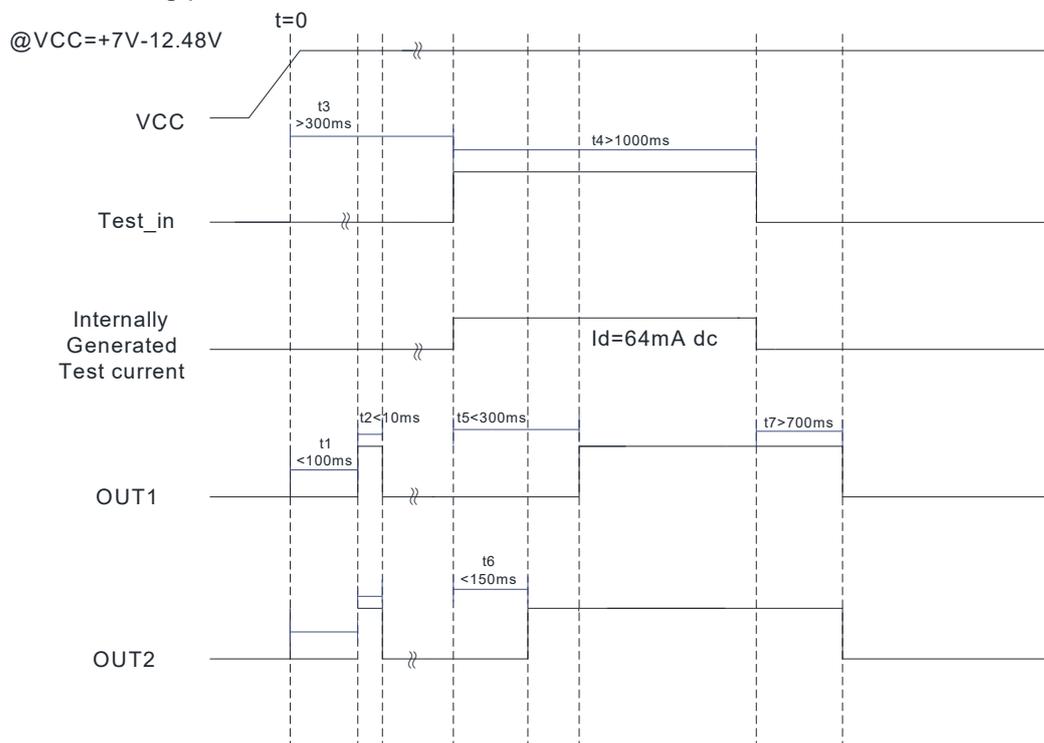

Item	Description	Notes	Timing(ms)		
			Min.	Typ.	Max.
t1	Initialization time		-	70	100
t2	Output pin set high	The host could detect the PIN go high at this point	-	2	10
t3	Delay before self-test		300	-	-
t4	Self-test duration		1000	-	-
t5	response time	the response time to self-test current of OUT1	-	10	300
t6	response time	the response time to self-test current of OUT2	-	10	150
t7	Delay time	Response delay after removing the self-test current	700	900	-